


MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 1000VA IN: 230/400VAC OUT: 230VAC


Single-phase - Control and Isolation Transformers
1000 VA
Isolation class T 40/B
Other voltages on request.

Link to Product

Illustration

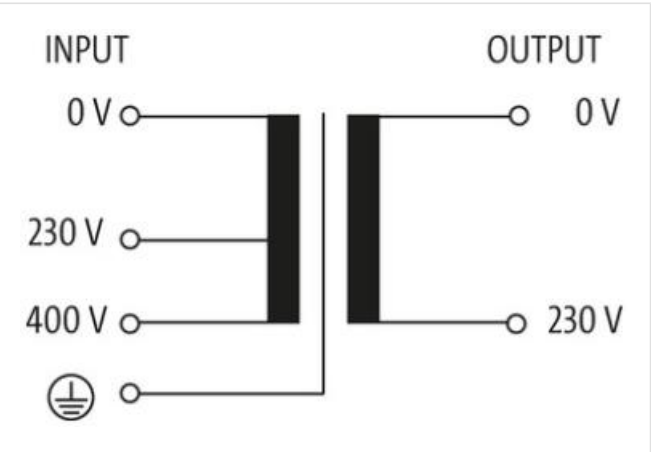

Product may differ from Image

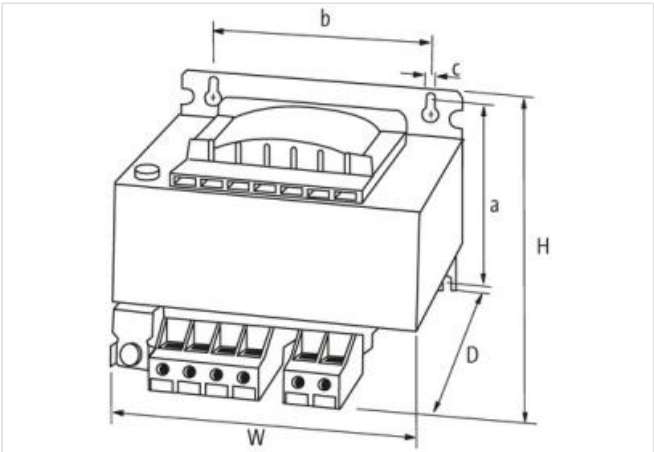

Commercial data	
ECLASS-6.0	27031302
ECLASS-6.1	27031302
ECLASS-7.0	27031302
ECLASS-8.0	27031302
ECLASS-9.0	27031302
ECLASS-10.1	27031302
ECLASS-11.1	27031302
ECLASS-12.0	27031302
ETIM-5.0	EC002486
customs tariff number	85043180
GTIN	4048879078627
Packaging unit	1
Electrical data Supply	
Power frequency	50 ... 60 Hz
Electrical data Input	
Input voltage 1 AC	230 V
Input voltage 2 AC	400 V
Input current at input voltage 1 AC	4,73 A
Input current at input voltage 2 AC	2,72 A
Inrush current at input voltage 1	66 A

Inrush current at input voltage 2	38 A
-----------------------------------	------

Short-circuit current at input voltage 1	148 A
--	-------

Short-circuit current at input voltage 2	85 A
--	------

Electrical data | Output

Output voltage AC	230 V
-------------------	-------

Output voltage adjustable	no
---------------------------	----

Power rating AC max.	1000 VA
----------------------	---------

Device protection | Electrical

Insulation test voltage input - output	4 kV
--	------

Mechanical data | Mounting data

Suitable for mounting type	Schlüssellochabhängung
----------------------------	------------------------

Mounting dimension a	102 mm
----------------------	--------

Mounting dimension b	135 mm
----------------------	--------

Mounting dimension c	7 mm
----------------------	------

Height	128 mm
--------	--------

Width	174 mm
-------	--------

Depth	160 mm
-------	--------

Diameter bore	7 mm
---------------	------

Length bore	11 mm
-------------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	40 °C
----------------------------	-------

Storage temperature min.	-40 °C
--------------------------	--------

Storage temperature max.	80 °C
--------------------------	-------

Conformity

Product standard	EN 61558-1, EN 61558-2-4, EN 62041 category 0
------------------	---