

EXACT12, 8XM12, 5-POLE, BASIC HOUSING

Without homerun-cable

8-way, 5-pole Form PNP Screw plug-in terminals


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration







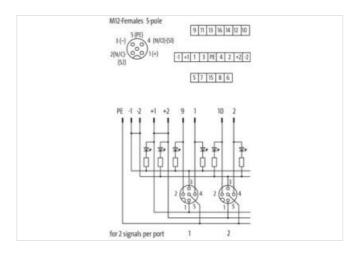

Product may differ from Image









Commercial data	
ECLASS-6.0	27143423
ECLASS-6.1	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219



sta	100	nn	PC	ted
JUG	,	,,,,,	CC	LCU

ECLASS-9.0	27440108
ECLASS-10.1	27440111
ECLASS-11.1	27440111
ECLASS-12.0	27440111
ETIM-5.0	EC002585
customs tariff number	85369010
GTIN	4048879054065
Packaging unit	1
Electrical data Supply	
Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	8 A
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65, IP67
Device protection Media	
Flame resistance	flame retardant
Mechanical data Material data	
Material housing	Plastic
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	70 °C