

SAFETY WIRING SYSTEM

Distributor Box

8-way distribution box
without electrical feedback




Replaces identical product (Art.No. 27057)


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

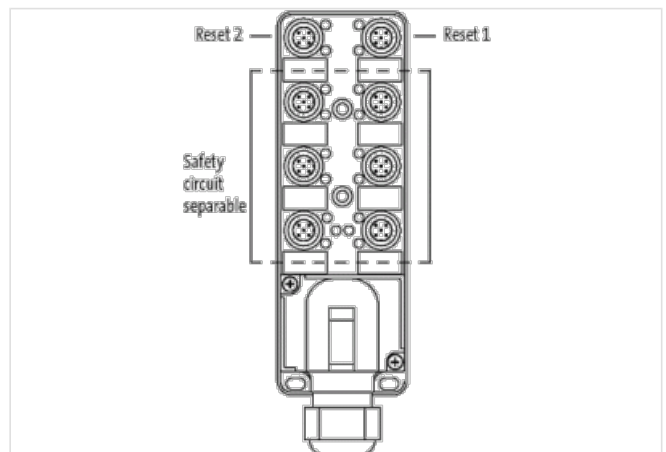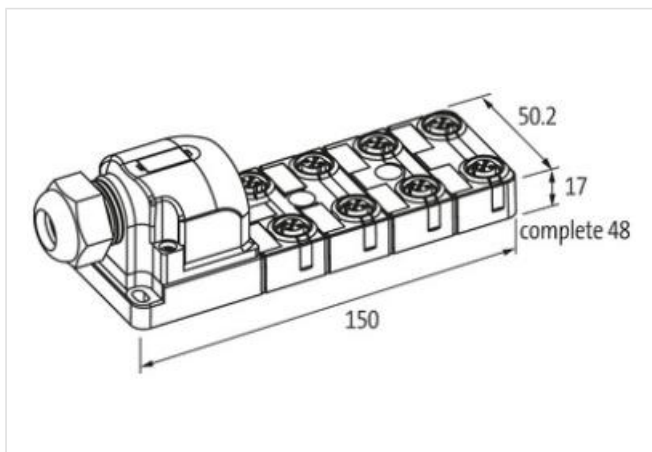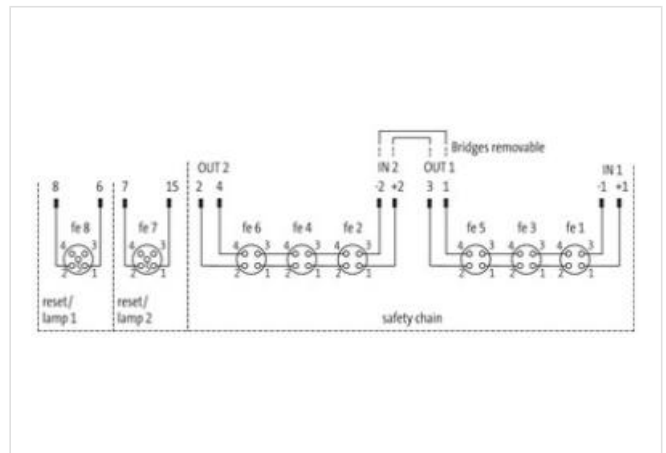

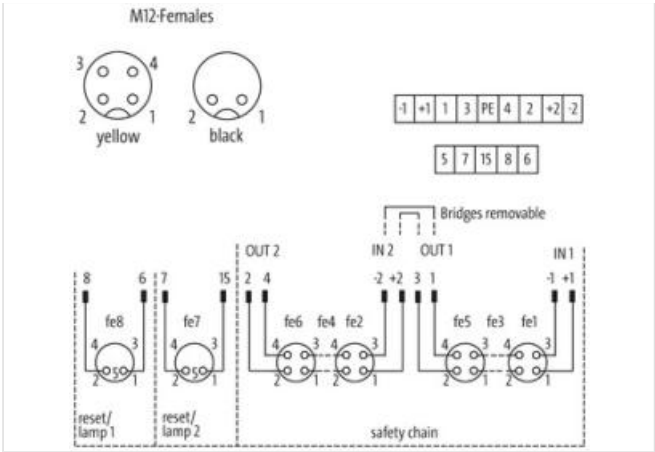

Product may differ from Image



Commercial data	
ECLASS-6.0	27143423
ECLASS-6.1	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108
ECLASS-10.1	27440111
ECLASS-11.1	27440111
ECLASS-12.0	27440111
ETIM-5.0	EC002585
customs tariff number	85369010
GTIN	4048879353380
Packaging unit	1
Electrical data Supply	
Operating voltage DC	24 V
Operating current per chain max.	1 A
Current operating per port max.	1 A
Installation Connection	
Mounting set	M12 x 1
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Insulation resistance min.	1000 MΩ
Overvoltage category (EN 60664-1)	III
Mechanical data Mounting data	
Mounting method	Schraubgewinde
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	80 °C
Conformity	
Product standard	EN 61131-2
Connection type 3	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-20
穆尔电子元器件（上海）有限公司 | 上海市普陀区绥德路628号C幢 | 200331 上海 | Fon +86 21 6284 7607 | Fax +86 21 6284 8526 | shop@murrelektronik.com.cn | shop.murrelektronik.com.cn

Family construction form	Cap
No. of poles	14
Family construction form	M12
Gender	female
Color contact carrier	yellow
Coding	A
No. of poles	5
PIN 1	11
PIN 2	12
PIN 3	21
PIN 4	22
PIN 5	n.c.
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	13
PIN 2	14
PIN 3	n.c.
PIN 4	n.c.
PIN 5	n.c.