


MICO IP67 electronic circuit protection, 4 Channels, 2A

IN: 24 V DC OUT: 24 V DC / 2 A CL2 / Expandable


MICO67 4.2 CL2
4 × M12, A-coded NEC CL2, (2 A)
Voltage IN and transmission via M12, L-coded (16 A)
24 V/16 A
24 V/2 A
LED port diagnostic
Limitation of the 4 voltage taps to 2 A (M12, A-coded)

Link to Product

Illustration

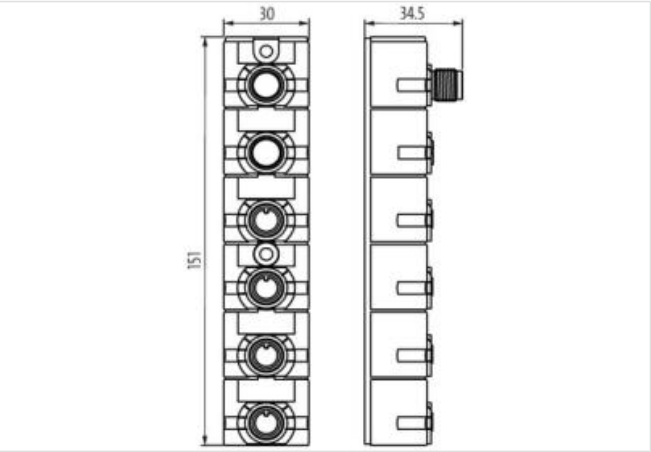

Product may differ from Image

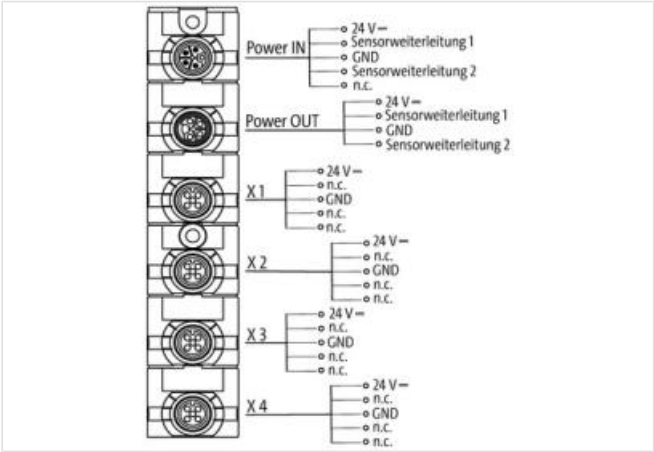

Commercial data

ECLASS-11.1	27371802
customs tariff number	85363010
GTIN	4048879852272
Packaging unit	1

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65, IP67
-------------------------------------	------------

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	45 °C
Storage temperature min.	-25 °C
Storage temperature max.	70 °C