
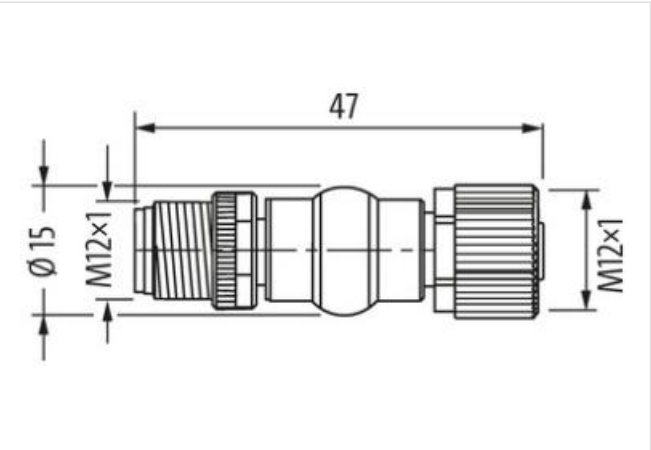
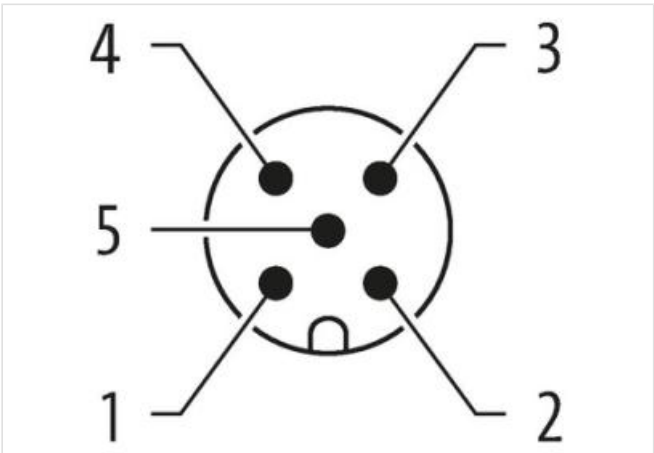
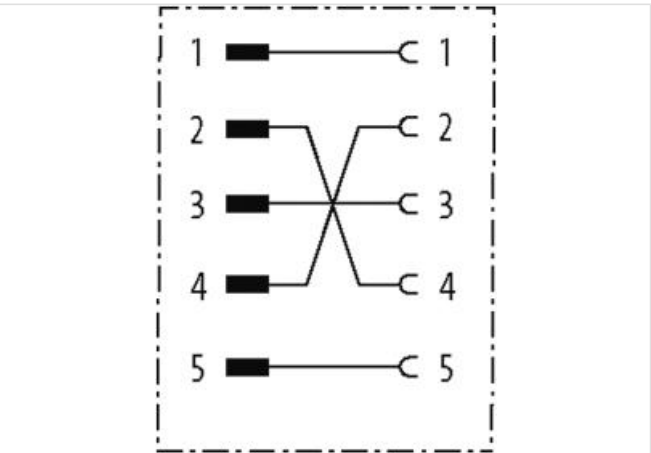


MSBL0-A-U BU.-ST.PIN 2AUF4/4AUF2 ADAPTER

适配器
M12 – M12
5芯

链接至具体产品

图示

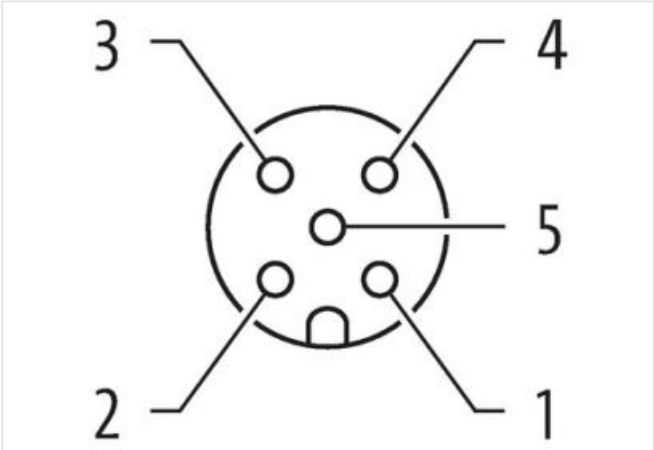

产品可能与图示有所不同

商业信息	
ECLASS-6.0	27279218
ECLASS-7.0	27279218
ECLASS-8.0	27279218
ECLASS-9.0	27060311
ECLASS-10.1	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC001855
ETIM-6.0	800102
GTIN	4048879255646
包装单位	10
海关税号	85366990
电气数据 供电	
最大工作电压 AC	24 V
最大工作电压 DC	24 V
每个触点的最大工作电流	4 A
安装 连接	
紧固扭矩	0,6 Nm
固定装置	M12 x 1
设备保护 电动	
防护类型（EN IEC 60529）	IP67
防护类型附加条件	插入, 用螺丝拧紧
额定绝缘电压	800 V
机械数据 材料数据	
锁紧装置的涂层	Nickeled
材料外壳	PUR
Locking material	压铸锌
机械数据 安装日期	
安装方式	插入, 用螺丝拧紧, 振动保护
环境特性 气候	
最小工作温度	-25 °C
最大工作温度	85 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.