



T-Coupler M12 male/ M12 male w.cable+female A-cod.

4-pol. / 2-pol. + 8-pol.


AIDA conform
T-型头 (窄型)
公头 直头 – 母头/公头直型
M12 – M12, 4芯
连接电缆 0.2m
分配功能 (常开触点)
用于8芯 组件
塑料外壳, 有较好的防油防化学腐蚀性能
耐化学腐蚀性能需相对相关应用进行测试. 更多信息需单独获取.

链接至具体产品

图示

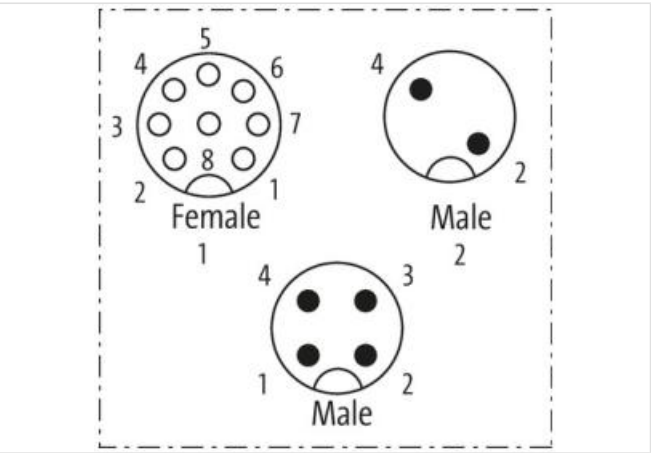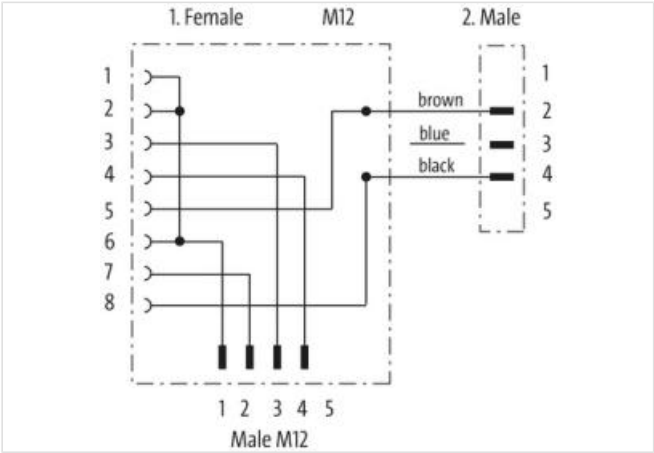

产品可能与图示有所不同

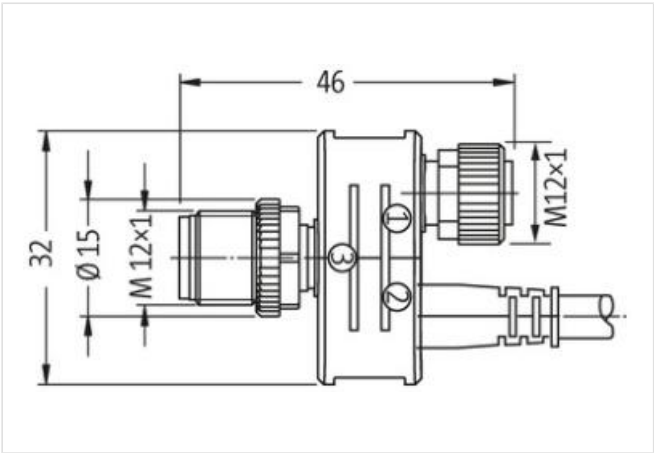

商业信息	
ECLASS-6.0	27279218
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440106
ECLASS-10.1	27440106

ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC002062
GTIN	4048879560351
包装单位	1
海关税号	85444290
电气数据 供电	
最大工作电压 AC	30 V
最大工作电压 DC	30 V
环境特性 气候	
最小工作温度	-25 °C
最大工作温度	85 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.